


HINGE SIDE OF ROOF
SIDE VIEW OF TYPE III CUT-OFF REFLECTOR SYSTEM

(2) HEX NUTS
(1) WASHER PER EA. BOLT

(4) 5/8" X 18" LONG ZINC PLATED STEEL ANCHOR BOLTS

CONCRETE BASE PER TOWN STANDARDS

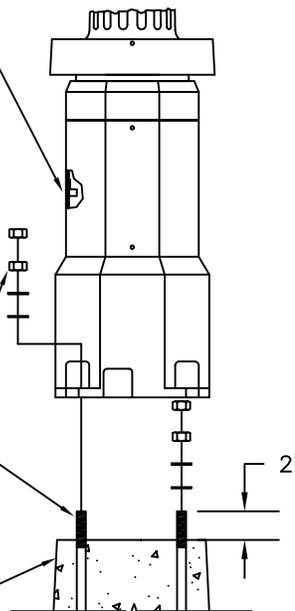

FURNISH 12'-0 1/4" POLE
3" O.D. TOP 4" O.D. BOTTOM x 0.125 WALL TAPERED ALUMINUM TUBING

CONTINUOUS WELD

25 1/4"

CAST ALUMINUM UPPER BASE WITH 14 FLUTES

CAST ALUMINUM OCTAGONAL BASE WELDED TO UPPER BASE



22 1/4"

CAST ALUMINUM REMOVABLE ACCESS DOOR

CAST ALUMINUM SQUARE SLIP-OVER BASE COVER WITH 2 SET SCREWS

2-1/2"

11-1/2" SQ.

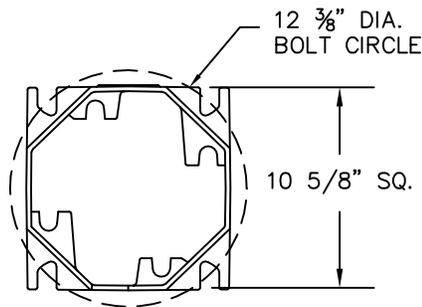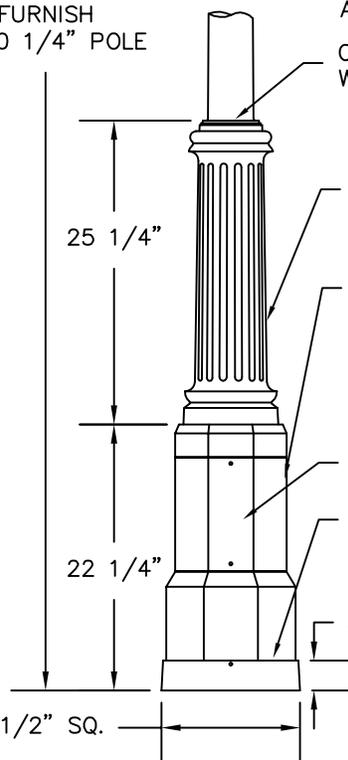

NOTES:

1. POLE AND LANTERN TO BE FACTORY PAINTED SATIN BLACK UNLESS OTHERWISE SPECIFIED.
2. LANTERN = HANOVER LANTERN, INC. DWG. NO. L49561 OR APPROVED EQUAL.
3. POLE = HANOVER LANTERN, INC. DWG. NO. 316-7 THRU 18 OR APPROVED EQUAL.



TOWN OF WINDSOR
Engineering Department



DECORATIVE LIGHT POLE,
LANTERN, AND BASE

D-402



SCALE: HOR. NTS
VER. DATE: FEB 2015